
	<h1>TARAeasy CCF1.0</h1>
Indicator	Free chlorine, pH dependent
Application	Swimming pool and drinking water The pH value must be constant.
Chlorination agents	inorganic chlorine compounds: NaOCl (=sodium hypochlorite), Ca(OCl) ₂ , chlorine gas
Measuring system	amperometric 3-electrode system with integrated electronics
Electronic	<p>Analog version:</p> <ul style="list-style-type: none"> - voltage output - not galvanically isolated electronics - analog internal data processing - output signal: analog (analog-out/analog) <p>Digital version:</p> <ul style="list-style-type: none"> - electronic is completely galvanically isolated - digital internal data processing - output signal: analog (analog-out/digital) or digital (digital-out/digital) <p>mA-version:</p> <ul style="list-style-type: none"> - current output analog - not galvanically isolated electronics - output signal: analog (analog-out/analog)
Working temperature	Measuring water temperature: 0 ... +45 °C (no ice crystals in the measuring water)
	Ambient temperature: 0 ... +55 °C
Temperature compensation	Automatically, through integrated temperature sensor Temperature jumps are to be avoided
Max. allowed working pressure	Operation without retaining ring: <ul style="list-style-type: none"> - 0.5 bar - no pressure surges and/or vibrations
	Operation with retaining ring in TARAflow FLC: <ul style="list-style-type: none"> - 8 bar - no pressure surges and/or vibrations (see option 1)
Flow rate (face velocity)	approx. 15-100 l/h (15 – 100 cm/s) in TARAflow FLC, low flow is present (see diagram "Slope of TARAeasy CCF1 versus flowrate", p. 5)
pH-range	pH 6 – pH 9, observe dissociation curve HOCl (see diagram "Slope of TARAeasy CCF1 versus pH", p. 5)
Conductivity	0.2 to 10 mS/cm
Run-in time	approx. 15 min.
Response time	T ₉₀ : approx. 20 sec.
Zero point adjustment	Not necessary

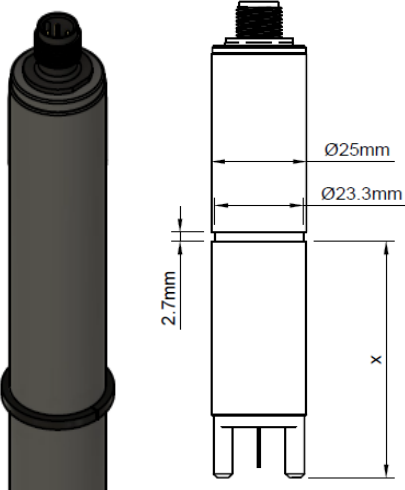


CE

<p>Option 1: Retaining ring</p>	<ul style="list-style-type: none"> – When operating with pressures >0.5 bar in TARAflow FLC – Dimensions retaining ring 29 x 23.4 x 2.5 mm, slitted, PETP – Different positions for groove selectable (on request) <p>X 1 = 65 mm 2 = 82 mm 3 = 98 mm 4 = 102 mm 5 = 107 mm</p>	
--	---	--

Technical Data


1. CCF1.0 (analog output, analog internal signal processing)

	Measuring range	Resolution	Output Output resistance	Nominal slope (at pH 7.2)	Voltage supply	Galvanic isolation required in the measuring device/controller **	Connection	Option 1 Retaining ring
	in ppm	in ppm		in mV/ppm				Positions
CCF1.0N	0.05...10.00 *	0.01	0...-2000 mV 1 kΩ	-100 (+/-50 %)	±5 - ±15 VDC 10 mA	yes	5-pole M12 plug-on flange Function of wires: PIN1: measuring signal PIN2: +U PIN3: -U PIN4: signal GND PIN5: n. c.	1

* concentration tested and approved up to 10 ppm
** for further information see brochure 'Technical information // galvanic isolation' (in the download area of our website www.reiss-gmbh.com)

(Subject to technical changes!)

2. CCF1.0 (analog output, digital internal signal processing)
analog-out / digital

	Measuring range	Resolution	Output Output resistance	Nominal slope (at pH 7.2)	Power supply	Galvanic isolation required in the measuring device/controller **	Connection	Option 1 Retaining ring
	in ppm	in ppm		in mV/ppm				Positions
CCF1.0N-An	0.05...10.00 *	0.01	0...-2000 mV 1 kΩ	-100 (+/-50 %)	9-30 VDC approx. 7-30 mA	no	5-pole M12 plug-on flange Function of wires: PIN1: measuring signal PIN2: +U PIN3: power GND PIN4: signal GND PIN5: n. c.	1, 2, 3, 4, 5
CCF1.0N-Ap	0.05...10.00 *	0.01	0...+2000 mV 1 kΩ	+100 (+/-50 %)				


* concentration tested and approved up to 10 ppm

** for further information see brochure 'Technical information // galvanic isolation' (in the download area of our website www.reiss-gmbh.com)

(Subject to technical changes!)

3. CCF1.0 (digital output, digital internal signal processing)

- The power supply is galvanically isolated inside of the sensor.
- The output signal is galvanically isolated too, that means potential-free.


	Measuring range	Resolution	Output Output resistance	Power supply	Galvanic isolation required in the measuring device/controller **	Connection	Option 1 Retaining ring
	in ppm	in ppm					Positions
CCF1.0N-M0c	0.05...10.00 *	0.01	Modbus RTU There are no terminating resistors in the sensor.	9-30 VDC approx. 7-30 mA	no	5-pole M12 plug-on flange Function of wires: PIN1: reserved PIN2: +U PIN3: power GND PIN4: RS485B PIN5: RS485A	1, 2, 3, 4, 5

* concentration tested and approved up to 10 ppm

** for further information see brochure 'Technical information // galvanic isolation' (in the download area of our website www.reiss-gmbh.com)

(Subject to technical changes!)

4. CCF1.0 4-20 mA

	Measuring range	Resolution	Output Output resistance	Nominal slope (at pH 7,2)	Voltage supply	Galvanic isolation required in the measuring device/controller **	Connection	Option 1 Retaining ring
	in ppm	in ppm		in mA/ppm				Positions
CCF1.0MA20-M12	0.05...10.00 *	0.01	4...20 mA uncalibrated	0.8 (+/-50 %)	12...30 VDC R _L 50Ω...R _L 900Ω	yes	5-pole M12 plug-on flange Function of wires: PIN1: n. c. PIN2: +U PIN3: -U PIN4: n. c. PIN5: n. c.	1


* concentration tested and approved up to 10 ppm

** for further information see brochure 'Technical information // galvanic isolation' (in the download area of our website www.reiss-gmbh.com)

(Subject to technical changes!)

Slope of TARAeasy CCF1 versus pH

Temperature: 25°C / Flow rate: 30 L/h

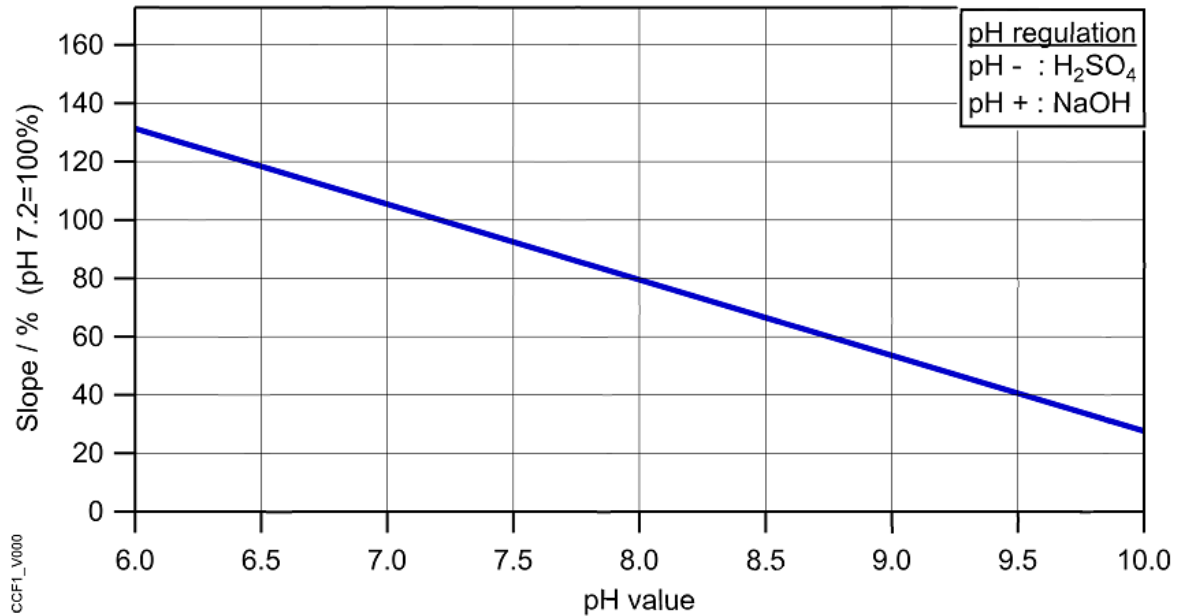

Slope of TARAeasy CCF1 versus Flow

Temperature: 25°C / pH value: 7.2

