


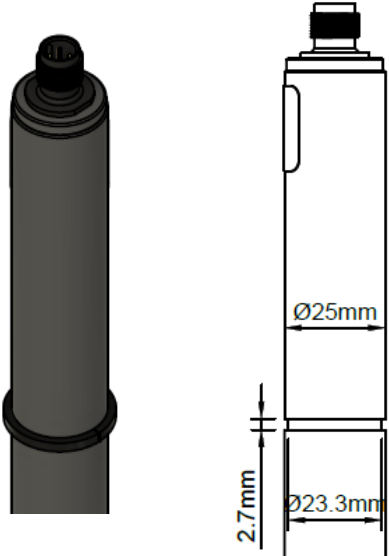
	<h1>TARAtec</h1> <h1>OZ10.1</h1>												
indicator	ozone												
Application	<p>All kinds of water treatment, also sea water, e. g.</p> <ul style="list-style-type: none"> <li>• Tap water</li> <li>• Deionised water</li> <li>• RO-water</li> </ul> <p>The membrane system is mechanical resistant.          The membrane system is highly resistant to surfactants (tensides).</p>												
Measuring system	Membrane covered, amperometric 2-electrode system												
Electronic	<p>Analog version:</p> <ul style="list-style-type: none"> <li>- voltage output</li> <li>- not galvanically isolated electronics</li> <li>- analog internal data processing</li> <li>- output signal: analog (analog-out/analog)</li> </ul> <p>Digital version:</p> <ul style="list-style-type: none"> <li>- electronic is completely galvanically isolated</li> <li>- digital internal data processing</li> <li>- output signal: analog (analog-out/digital) or digital (digital-out/digital)</li> </ul> <p>mA-version:</p> <ul style="list-style-type: none"> <li>- current output analog</li> <li>- not galvanically isolated electronics</li> <li>- output signal: analog (analog-out/analog)</li> </ul>												
Information about the measuring range	<p>The actual slope of a sensor can vary production-related between 65% and 150% of the nominal slope</p> <p>Note: With a slope &gt; 100% the measuring range is reduced accordingly.          (Ex.: 150% slope → 67% of the specified measuring range)</p>												
Accuracy after calibration at repeatability conditions (15°C, pH 7.2 in drinking water) of the upper full scale	<table border="0"> <tr> <td>– Measuring range 2 mg/l:</td> <td>at 0.4 mg/l</td> <td>&lt;1%</td> </tr> <tr> <td></td> <td>at 1.6 mg/l</td> <td>&lt;3%</td> </tr> <tr> <td>– Measuring range 20 mg/l:</td> <td>at 4 mg/l</td> <td>&lt;1%</td> </tr> <tr> <td></td> <td>at 16 mg/l</td> <td>&lt;2%</td> </tr> </table>	– Measuring range 2 mg/l:	at 0.4 mg/l	<1%		at 1.6 mg/l	<3%	– Measuring range 20 mg/l:	at 4 mg/l	<1%		at 16 mg/l	<2%
– Measuring range 2 mg/l:	at 0.4 mg/l	<1%											
	at 1.6 mg/l	<3%											
– Measuring range 20 mg/l:	at 4 mg/l	<1%											
	at 16 mg/l	<2%											
Limit of detection	– Measuring range 2 mg/l: 0.02 ppm												
Working temperature	Measuring water temperature: 0 ... +45 °C (no ice crystals in the measuring water)												
	Ambient temperature: 0 ... +55 °C												
Temperature compensation	<p>Automatically, by an integrated temperature sensor</p> <p>Response time <math>t_{90}</math> = approx. 8 min.</p> <p>Sudden temperature changes must be avoided</p>												

	<h1>TARAtec OZ10.1</h1>	
Max. allowed working pressure	Operation without retaining ring: – 0.5 bar – no pressure impulses and/or vibrations Operation with retaining ring in TARAflow FLC: – 1.0 bar, – no pressure impulses and/or vibrations (see option 1)	
Flow rate (Incoming flow velocity)	approx. 15-30 l/h (33 – 66 cm/s) in TARAflow FLC, small flow rate dependence is given	
pH-range	pH 4 – pH 9	
Run-in time	First start-up approx. 1 h	
Response time	$T_{90}$ : approx. 8 min.	
Zero point adjustment	Not necessary	
calibration	At the device, by analytical determination, e. g. DPD-4 method (DPD-1 + DPD-3) Advice: when used in sea water DPD-4 method (DPD-1 + DPD-3) is not selective to ozone	
interferences	$Cl_2$ : OZ10.1H: factor 0.015 OZ10.1N: negligible $ClO_2$ : OZ10.1N: factor 0.06	
Absence of the disinfectant	Max. 24 h	
Connection	mV version: 5-pole M12, plug-on flange Modbus version: 5-pole M12, plug-on flange 4-20 mA version: 2-pole terminal or 5-pole M12, plug-on flange	
max. length of sensor cable (depending on internal signal processing)	analog	< 30 m
	digital	> 30 m are permissible Maximum cable length depends on application
Protection type	5-pole M12 plug-on flange: IP68 2-pole terminal with mA-hood: IP65	
material	Elastomer membrane, PVC-U, stainless steel 1.4571	
Size	diameter: approx. 25 mm Length: mV version approx. 190 mm (analog signal processing) approx. 205 mm (digital signal processing) Modbus version approx. 205 mm 4-20 mA version approx. 220 mm (2-pole-terminal) approx. 190 mm (5-pole-M12)	


	<h1>TARAttec OZ10.1</h1>
<p>Transport</p>	<p>+5 ... +50 °C (Sensor, electrolyte, membrane cap)</p>
<p>storage</p>	<p>Sensor: dry and without electrolyte no limit at +5 ... +40 °C</p>
	<p>Electrolyte: in original bottle protected from sunlight at +5 ... +35 °C min 1 year or until specified EXP-Date</p>
	<p>Membrane cap: in original packing no limit at +5 ... +40 °C (used membrane caps can not be stored)</p>
<p>maintenance</p>	<p>Regularly control of the measuring signal, min. once a week The following specifications depend on the water quality: Change of the membrane cap: once a year Change of the electrolyte: every 3 - 6 months</p>
	<p>EMC tested RoHS compliant</p>

<p><b>Option 1: Retaining ring</b></p>	<ul style="list-style-type: none"> <li>- When operating with pressures &gt;0.5 bar in TARAttec FLC</li> <li>- Dimensions retaining ring 29 x 23.4 x 2.5 mm, slitted, PETP</li> <li>- Different positions for groove selectable (on request)</li> </ul>	
--------------------------------------------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	--------------------------------------------------------------------------------------

## Technical Data

### 1. OZ10.1 (Analog output, analog internal signal processing)

A potential-free electrical connection is necessary as the sensor electronic is not equipped with a galvanical isolation.


	Measuring range	Resolution	Output Output resistance	Nominal slope	Voltage supply	Connection
	in ppm	in ppm		in mV/ppm		
OZ10.1H-M12	0.005...2.000	0.001	0...-2000 mV 1 kΩ	-1000	±5 - ±15 VDC 10 mA	5-pole M12 plug-on flange  Function of wires: PIN1: measuring signal PIN2: +U PIN3: -U PIN4: signal GND PIN5: n. c.
OZ10.1N-M12	0.05...20.00	0.01		-100		
OZ10.1HUp-M12	0.005...2.000	0.001	0...+2000 mV 1 kΩ	+1000	10 - 30 VDC 10 mA	
OZ10.1Up-M12	0.05...20.00	0.01		+100		

(Subject to technical changes!)

### 2. OZ10.1 (analog output, digital internal signal processing)

analog-out / digital


- The power supply is galvanically isolated inside of the sensor.
- The output signal is galvanically isolated too, that means potential-free.

	Measuring range	Resolution	Output Output resistance	Nominal Slope	Power supply	Connection
	in ppm	in ppm		in mV/ppm		
OZ10.1H-An-M12	0.005...2.000	0.001	analog 0...-2 V (max. -2.5 V)	-1000	9-30 VDC  approx. 20-56 mA	5-pole M12 plug-on flange  Function of wires: PIN1: measuring signal PIN2: +U PIN3: power GND PIN4: signal GND PIN5: n. c.
OZ10.1N-An-M12	0.05...20.00	0.01	1 kΩ	-100		
OZ10.1H-Ap-M12	0.005...2.000	0.001	analog 0...+2 V (max. +2.5 V)	+1000		
OZ10.1N-Ap-M12	0.05...20.00	0.01	1 kΩ	+100		

(Subject to technical changes!)

### 3. OZ10.1 (digital output, digital internal signal processing)

- The power supply is galvanically isolated inside of the sensor.
- The output signal is galvanically isolated too, that means potential-free.


	Measuring range  in ppm	Resolution  in ppm	Output Output resistance	Power supply	Connection
OZ10.1H-M0c	0.005...2.000	0.001	Modbus RTU  There are no terminating resistors in the sensor.	9-30 VDC  approx. 20-56 mA	5-pole M12 plug-on flange  Function of wires: PIN1: reserved PIN2: +U PIN3: power GND PIN4: RS485B PIN5: RS485A
OZ10.1N-M0c	0.05...20.00	0.01			

(Subject to technical changes!)

### 4. OZ10.1 4-20 mA (Analog output, analog internal signal processing)


A potential-free electrical connection is necessary as the sensor electronic is not equipped with a galvanical isolation.

#### 4.1 Electrical connection: 2 pole terminal clamp

	Measuring range  in ppm	Resolution  in ppm	Output Output resistance	Nominal slope  in mA/ppm	Voltage supply	Connection
OZ10.1MA0.5	0.005...0.500	0.001	4...20 mA  uncalibrated	32.0	12...30 VDC  $R_L = 50\Omega (12V) \dots R_L 900\Omega (30V)$	2-pole terminal (2 x 1 mm <sup>2</sup> )  Recommended: Round cable Ø 4 mm 2 x 0.34 mm <sup>2</sup>
OZ10.1MA2	0.005...2.000	0.001		8.0		
OZ10.1MA5	0.05...5.00	0.01		3.2		
OZ10.1MA10	0.05...10.00	0.01		1.6		
OZ10.1MA20	0.05...20.00	0.01		0.8		

(Subject to technical changes!)

#### 4.2 Electrical connection: 5 pole M12 plug-on flange

	Measuring range	Resolution	Output Output resistance	Nominal slope	Voltage supply	Connection
	in ppm	in ppm		in mA/ppm		
OZ10.1MA0.5-M12	0.005...0.500	0.001	4...20 mA uncalibrated	32.0	12...30 VDC R <sub>L</sub> = 50Ω (12V) ... R <sub>L</sub> 900Ω (30V)	5-pole M12 plug-on flange  Function of wires: PIN1: n. c. PIN2: +U PIN3: -U PIN4: n. c. PIN5: n. c.
OZ10.1MA2-M12	0.005...2.000	0.001		8.0		
OZ10.1MA5-M12	0.05...5.00	0.01		3.2		
OZ10.1MA10-M12	0.05...10.00	0.01		1.6		
OZ10.1MA20-M12	0.05...20.00	0.01		0.8		

(Subject to technical changes!)

#### Spare Parts

Type	Membrane cap	Electrolyte	Emery	O-ring
All OZ10.1	M10.3N Art. no. 11057	EOZ7/W, 100 ml Art. no. 11102	S2 Art. no. 11906	20 x 1.5 silicone Art. no. 11803

(Subject to technical changes!)

### Slope of TARAtec OZ10.1 versus Flow

Temperature: 25°C / pH value: 7.2 / Ozone: 0.2 ppm

