

TARAtec® OZ10.1

indicator	ozone
Application	All kinds of water treatment, also sea water, e. g. • Tap water • Deionised water • RO-water The membrane system is mechanical resistant. The membrane system is highly resistant to surfactants (tensides).
Measuring system	Membrane covered, amperometric 2-electrode system
Electronic	Analog version: - voltage output - not galvanically isolated electronics - analog internal data processing - output signal: analog (analog-out/analog) Digital version: - electronic is completely galvanically isolated - digital internal data processing - output signal: analog (analog-out/digital) or digital (digital-out/digital) mA-version: - current output analog - not galvanically isolated electronics - output signal: analog (analog-out/analog)
Information about the measuring range	The actual slope of a sensor can vary production-related between 65% and 150% of the nominal slope Note: With a slope > 100% the measuring range is reduced accordingly. (Ex.: 150% slope → 67% of the specified measuring range)
Accuracy after calibration at repeatability conditions (15°C, pH 7.2 in drinking water) of the upper full scale	– Measuring range 2 mg/l: at 0.4 mg/l <1% at 1.6 mg/l <3% – Measuring range 20 mg/l: at 4 mg/l <1% at 16 mg/l <2%
Limit of detection	– Measuring range 2 mg/l: 0.02 ppm
Working temperature	Measuring water temperature: 0 … +45 °C (no ice crystals in the measuring water) Ambient temperature: 0 … +55 °C
Temperature compensation	Automatically, by an integrated temperature sensor Response time t_{90} = approx. 8 min. Sudden temperature changes must be avoided




TARAtec® OZ10.1

Max. allowed working pressure	Operation without retaining ring: – 0.5 bar – no pressure impulses and/or vibrations	
	Operation with retaining ring in TARAflow® FLC: – 1.0 bar, – no pressure impulses and/or vibrations (see option 1)	
Flow rate (Incoming flow velocity)	approx. 15-30 l/h (15 – 30 cm/s) in TARAflow® FLC, small flow rate dependence is given	
pH-range	pH 4 – pH 9	
Run-in time	First start-up approx. 1 h	
Response time	T_{90}: approx. 8 min.	
Zero point adjustment	Not necessary	
calibration	At the device, by analytical determination, e. g. DPD-4 method (DPD-1 + DPD-3) Advice: when used in sea water DPD-4 method (DPD-1 + DPD-3) is not selective to ozone	
interferences	Cl_2: OZ10.1H: factor 0.015 OZ10.1N: negligible ClO_2: OZ10.1N: factor 0.06	
Absence of the disinfectant	Max. 24 h	
Connection	mV version: 5-pole M12, plug-on flange Modbus version: 5-pole M12, plug-on flange 4-20 mA version: 2-pole terminal or 5-pole M12, plug-on flange	
max. length of sensor cable (depending on internal signal processing)	analog	< 30 m
	digital	> 30 m are permissible Maximum cable length depends on application
Protection type	5-pole M12 plug-on flange: IP68 2-pole terminal with mA-hood: IP65	
material	Elastomer membrane, PVC-U, stainless steel 1.4571	
Size	diameter: approx. 25 mm Length: mV version approx. 190 mm (analog signal processing) approx.. 205 mm (digital signal processing) Modbus version approx. 205 mm 4-20 mA version approx. 220 mm (2-pole-terminal) approx. 190 mm (5-pole-M12)	



TARAtec® OZ10.1

Transport	+5 … +50 °C (Sensor, electrolyte, membrane cap)	
storage	Sensor:	dry and without electrolyte no limit at +5 … +40 °C
	Electrolyte:	in original bottle protected from sunlight at +5 … +35 °C min 1 year or until specified EXP-Date
	Membrane cap:	in original packing no limit at +5 … +40 °C (used membrane caps can not be stored)
maintenance	Regularly control of the measuring signal, min. once a week The following specifications depend on the water quality: Change of the membrane cap: once a year Change of the electrolyte: every 3 - 6 months	
CE	EMC tested RoHS compliant	

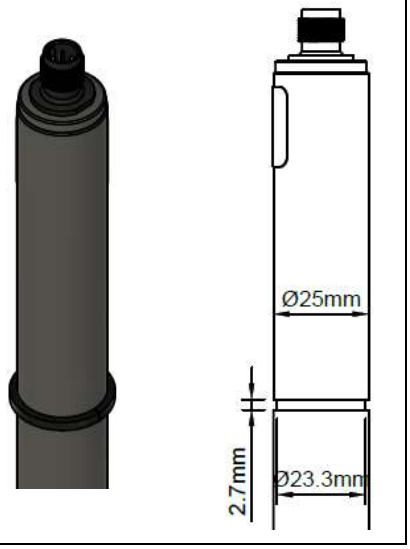Option 1: **Retaining ring**	– When operating with pressures >0.5 bar in TARAflow® FLC – Dimensions retaining ring 29 x 23.4 x 2.5 mm, slitted, PETP – Different positions for groove selectable (on request)	

Technical Data

1. OZ10.1 (Analog output, analog internal signal processing)

	**Measuring range** **in ppm**	**Resolution** **in ppm**	**Output** **Output resistance**	**Nominal slope** **in mV/ppm**	**Voltage supply**	**Galvanic isolation required in the measuring device/controller ***	**Connection**
OZ10.1H-M12	0.005…2.000	0.001	0…-2000 mV 1 kΩ	-1000	±5 - ±15 VDC 10 mA	yes	5-pole M12 plug-on flange Function of wires: PIN1: measuring signal PIN2: +U PIN3: -U PIN4: signal GND PIN5: n. c.
OZ10.1N-M12	0.05…20.00	0.01		-100			
OZ10.1HUp-M12	0.005…2.000	0.001	0…+2000 mV 1 kΩ	+1000	10 - 30 VDC 10 mA		5-pole M12 plug-on flange Function of wires: PIN1: measuring signal PIN2: +U PIN3: power GND PIN4: signal GND PIN5: n. c.
OZ10.1Up-M12	0.05…20.00	0.01		+100			

* for further information see brochure ‘Technical information // galvanic isolation’ (in the download area of our website www.reiss-gmbh.com)

(Subject to technical changes!)

2. OZ10.1 (analog output, digital internal signal processing)

analog-out / digital

	**Measuring range** **in ppm**	**Resolution** **in ppm**	**Output** **Output resistance**	**Nominal slope** **in mV/ppm**	**Power supply**	**Galvanic isolation required in the measuring device/controller ***	**Connection**
OZ10.1H-An-M12	0.005…2.000	0.001	analog 0…-2 V (max. -2.5 V)	-1000	9-30 VDC approx. 7-30 mA	no	5-pole M12 plug-on flange Function of wires: PIN1: measuring signal PIN2: +U PIN3: power GND PIN4: signal GND PIN5: n. c.
OZ10.1N-An-M12	0.05…20.00	0.01	1 kΩ	-100			
OZ10.1H-Ap-M12	0.005…2.000	0.001	analog 0…+2 V (max. +2.5 V)	+1000			
OZ10.1N-Ap-M12	0.05…20.00	0.01	1 kΩ	+100			

* for further information see brochure ‘Technical information // galvanic isolation’ (in the download area of our website www.reiss-gmbh.com)

(Subject to technical changes!)

3. OZ10.1 (digital output, digital internal signal processing)

	**Measuring range** **in ppm**	**Resolution** **in ppm**	**Output** **Output resistance**	**Power supply**	**Galvanic isolation required in the measuring device/controller ***	**Connection**
OZ10.1H-M0c	0.005…2.000	0.001	Modbus RTU There are no terminating resistors in the sensor.	9-30 VDC approx. 7-30 mA	no	5-pole M12 plug-on flange Function of wires: PIN1: reserved PIN2: +U PIN3: power GND PIN4: RS485B PIN5: RS485A
OZ10.1N-M0c	0.05…20.00	0.01				

* for further information see brochure ‘Technical information // galvanic isolation’ (in the download area of our website www.reiss-gmbh.com)

(Subject to technical changes!)

4. OZ10.1 4-20 mA (Analog output, analog internal signal processing)

4.1 Electrical connection: 2 pole terminal clamp

	**Measuring range** **in ppm**	**Resolution** **in ppm**	**Output** **Output resistance**	**Nominal slope** **in mA/ppm**	**Voltage supply**	**Galvanic isolation required in the measuring device/controller ***	**Connection**
OZ10.1MA0.5	0.005…0.500	0.001	4…20 mA uncalibrated	32.0	12…30 VDC R_L = 50Ω (12V) … R_L 900Ω (30V)	yes	2-pole terminal (2 x 1 mm²) Recommended: Round cable ∅ 4 mm 2 x 0.34 mm²
OZ10.1MA2	0.005…2.000	0.001		8.0			
OZ10.1MA5	0.05…5.00	0.01		3.2			
OZ10.1MA10	0.05…10.00	0.01		1.6			
OZ10.1MA20	0.05…20.00	0.01		0.8			

* for further information see brochure ‘Technical information // galvanic isolation’ (in the download area of our website www.reiss-gmbh.com)

(Subject to technical changes!)

4.2 Electrical connection: 5 pole M12 plug-on flange

	**Measuring range** **in ppm**	**Resolution** **in ppm**	**Output** **Output resistance**	**Nominal slope** **in mA/ppm**	**Voltage supply**	**Galvanic isolation required in the measuring device/controller ***	**Connection**
OZ10.1MA0.5-M12	0.005…0.500	0.001	4…20 mA uncalibrated	32.0	12…30 VDC R_L = 50Ω (12V) … R_L 900Ω (30V)	yes	5-pole M12 plug-on flange Function of wires: PIN1: n. c. PIN2: +U PIN3: -U PIN4: n c. PIN5: n. c.
OZ10.1MA2-M12	0.005…2.000	0.001		8.0			
OZ10.1MA5-M12	0.05…5.00	0.01		3.2			
OZ10.1MA10-M12	0.05…10.00	0.01		1.6			
OZ10.1MA20-M12	0.05…20.00	0.01		0.8			

* for further information see brochure ‘Technical information // galvanic isolation’ (in the download area of our website www.reiss-gmbh.com)

(Subject to technical changes!)


Spare Parts

Type	Membrane cap	Electrolyte	Emery	O-ring
All OZ10.1	M10.3N Art. no. 11057	EOZ7/W, 100 ml Art. no. 11102	S2 Art. no. 11906	20 x 1.5 silicone Art. no. 11803

(Subject to technical changes!)

Reiss GmbH
Eisleber Str. 5
D – 69469 Weinheim
Germany

Linearity of TARAtec® OZ10.1H
(at low ozone concentrations)

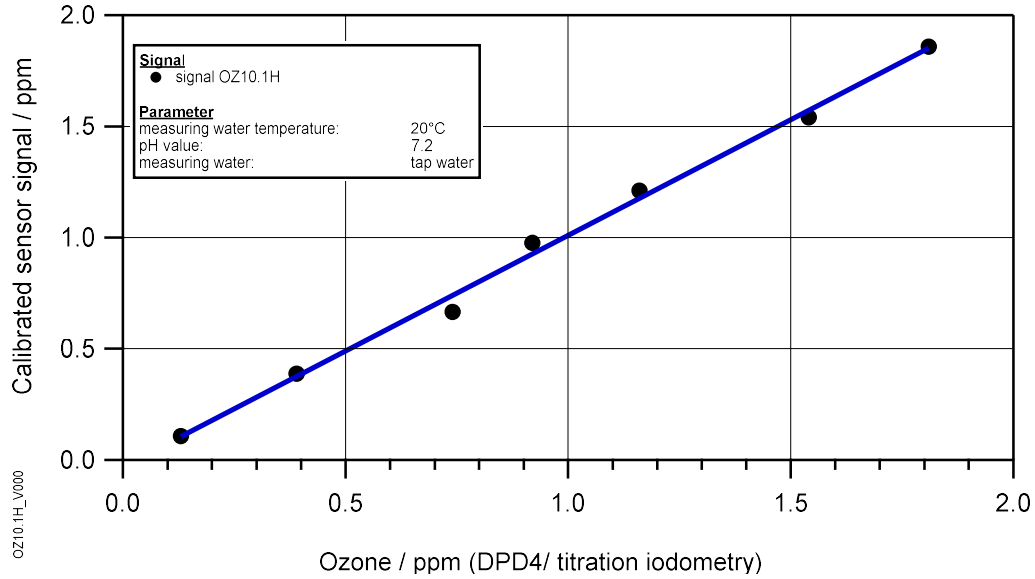

Slope of TARAtec® OZ10.1 versus Flow

Temperature: 25°C / pH value: 7.2 / Ozone: 0.2 ppm

